

# **TO-220 Power Resistor**




#### Features

- -30 watts at 25°C case temperature heat sink mounted
- TO-220 style power package
- Single screw mounting to heat sink
- -Molded case for protection and easy to mount
- Electrically isolated case
- -Non-Inductive design

### Applications

- -Gate Resistors in Power Supplies
- Snubbers
- $-\operatorname{Load}$  and Dumping Resistors in CRT Monitors
- Terminal Resistance in RF Power Amplifiers
- Voltage Regulation
- Low Energy Pulse Loading
- -UPS

### Construction

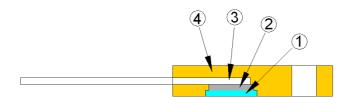


1	Alumina Substrate	3	Lead
2	Resistor Layer	4	Molding


### Dimensions

Unit: mm

Туре	Weight (g) (1000pcs)	Packaging Tube	
TR30	1155	50pcs	

## Derating Curve

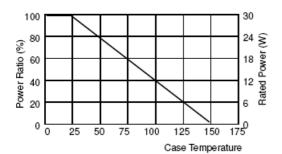

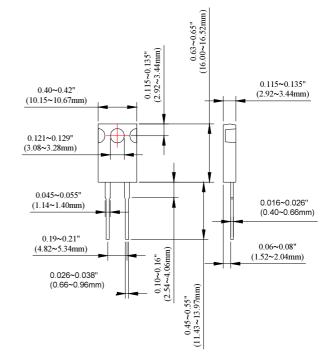


# TR30 Series

### **TO-220 Power Resistor**



### Part Numbering

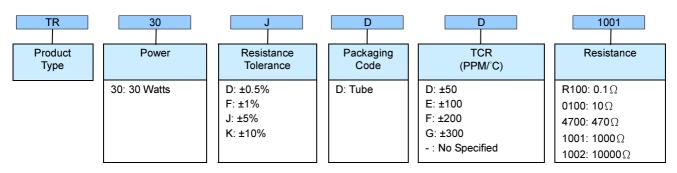

### Electrical Characteristics Specifications

ltem	Resistance Range				TCR (PPM/°C)
Туре	±0.5%	±1%	±5%	±10%	. , ,
	-	-	0.05Ω –1Ω		No Specified
	-	>1Ω –3Ω			±300
TR30	-	>3Ω –10Ω			±100 ±200
	>10Ω –100ΚΩ			±50 ±100 ±200	

Operating Voltage: 420V max.

■ Dielectric Strength: 1800VAC

Insulation Resistance: 10GΩ min.

■ Working Temperature Range: -65°C to +150°C

■ Resistance Value < 1Ω is available</p>

### Environmental Characteristics

ltem	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, $\Delta$ R taken at +105°C
Short Time Overload	∆R±0.3%	2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds
Load Life	∆R±1.0%	2,000 hours at rated power
Damp Heat with Load	∆R±0.5%	$40{\pm}2^{\circ}C,~90{\sim}95\%$ R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	90% min. coverage	245±5°C for 3 seconds
Thermal Shock	∆R±0.3%	-65°C~150°C, 100 cycles
Terminal Strength	∆R±0.2%	(Pull Test) 2.4N
Vibration, High Frequency	∆ <b>R±0.2%</b>	20g peak

Lead Material: Tinned Copper

Maximum Torque: 0.9 N-m

■ When in Free Air at 25°C, the TR30 is Rated for 2.25W

■ The Case Temperature is to be used for the Definition of the Applied Power Limit

The Case Temperature Measurement must be made with a Thermocouple Contacting the Center of the Component mounted

on the Designed Heat Sink.

Thermal Grease should be Applied Properly

RCWV(Rated continuous working voltage)=  $\sqrt{(P^*R)}$  or Max. Operating voltage whichever is lower